




China 608z Bearing Supplier

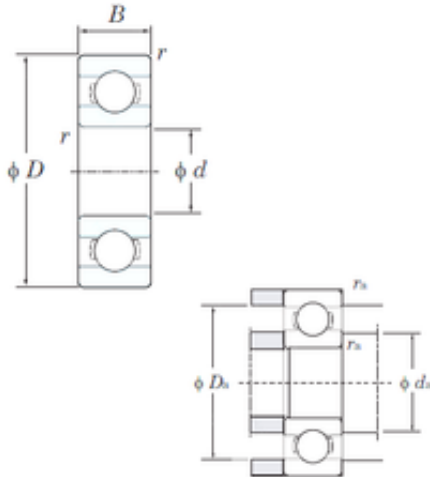

SKF NSK Timken Koyo NTN Deep Groove Ball Bearing 608 Z Zz -2z 2rsh 2rsl /C3 Tn9 8*22*7

Bearing No. 608

| | |
|-------------------------------|--------------------------|
| Size | 8x22x7 mm |
| Bore Diameter | 8 mm |
| Outer Diameter | 22 mm |
| Width | 7 mm |
| d | 8 mm |
| D | 22 mm |
| B | 7 mm |
| C | 7 mm |
| r min. | 0,3 mm |
| r1 min. | 0,3 mm |
| da min. | 10 mm |
| Da max. | 20 mm |
| ra max. | 0,3 mm |
| Weight | 0,012 Kg |
| Basic dynamic load rating (C) | 3,3 kN |
| Basic static load rating (C0) | 1,35 kN |
| (Grease) Lubrication Speed | 34000 r/min |
| (Oil) Lubrication Speed | 41000 r/min |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | KOYO |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| Product Group | B00308 |
| Enclosure | Open |

608 Bearing 2D drawings and 3D CAD models



China 608z Bearing Supplier

| | |
|---------------------------------|---|
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 8MM Bore; 22MM Outside Diameter; 7MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage |
| Other Features | Deep Groove |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.koyousa.com |
| Weight / LBS | 0.0265 |
| Outside Diameter | 0.866 Inch 22 Millimeter |
| Outer Race Width | 0.276 Inch 7 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Bore | 0.315 Inch 8 Millimeter |
| Bearing No. | 608 |
| r(min) | 0.3 |
| Cr | 4.10 |
| C0r | 1.35 |
| Cu | 0.060 |
| f0 | 12.4 |



China 608z Bearing Supplier

| | |
|------------------|-------|
| Grease lub. | 34000 |
| Oil lub. | 41000 |
| da(min) | 10 |
| Da(max) | 20 |
| ra(max) | 0.3 |
| (Refer.) Mass(g) | 12 |